

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38, H04B 7/26		A1	(11) International Publication Number: WO 98/49857
			(43) International Publication Date: 5 November 1998 (05.11.98)
(21) International Application Number: PCT/SE98/00751		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 24 April 1998 (24.04.98)			
(30) Priority Data: 08/847,655 30 April 1997 (30.04.97) US			
(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventors: ESMAILZADEH, Riaz; Century II #305, 286, Miyazaki Miyamae-ku, Kawasaki-shi, Kanagawa 216-0033 (JP). GUSTAFSSON, Maria; Medborgarplatsen 11, 2trp, S-118 26 Stockholm (SE).			
(74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).			
		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: RANDOM ACCESS IN A MOBILE TELECOMMUNICATIONS SYSTEM

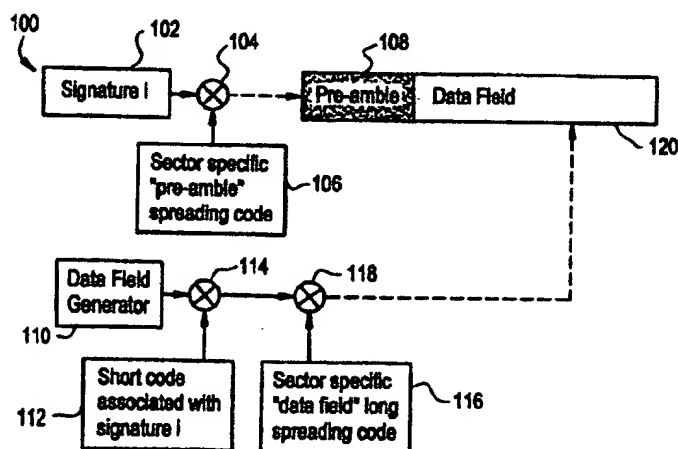

(57) Abstract

A method is disclosed that assigns each sector in a cell a unique preamble spreading code (106) and a unique long-code (116) which is concatenated with a signature-associated short code (112) to spread the data in the data field (120). The period selected for the long-code (116) can be relatively long in duration (e.g., up to hours or days in length). The widths of the transmission time slots are set equal to the length of the preambles (108). Consequently, the mobile station's random access requests (20, 22, 24) can be timed to start at the beginning of the slots, and detected during the preamble periods by the matched filter in the base station's random access receiver. The data field (120) of the mobile station's random access request (20, 22, 24) is transmitted in the slots following the preamble (108) and received by the rake receiver at the base station.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

RANDOM ACCESS IN A
MOBILE TELECOMMUNICATIONS SYSTEM

5 RELATED APPLICATIONS

This application is related by subject matter to commonly-assigned U.S. Patent Application Serial No. 08/733,501, which was filed October 18, 1996.

BACKGROUND OF THE INVENTION

10 Technical Field of the Invention

The present invention relates generally to the field of mobile telecommunications and, in particular, to a method for processing multiple random access mobile-originated calls.

15 Description of Related Art

The next generation of mobile communications systems will be required to provide a broad selection of telecommunications services including digital voice, video and data in packet and channel circuit-switched modes.

20 As a result, the number of calls being made is expected to increase significantly, which will result in much higher traffic density on random access channels (RACHs). Unfortunately, this higher traffic density will also result in increased collisions and access failures.

25 Consequently, the new generation of mobile communications systems will have to use much faster and flexible random access procedures, in order to increase their access

-2-

success rates and reduce their access request processing times.

In most mobile communications systems, such as, for example, the European joint development referred to as the "Code Division Testbed" (CODIT), and systems operating in accordance with the IS-95 Standard (ANSI J-STD-008), a mobile station can gain access to a base station by first determining that the RACH is available for use. Then, the mobile station transmits a series of access request preambles (e.g., single 1023 chip symbols) with increasing power levels, until the base station detects the access request. In response, the base station starts the process of controlling the mobile station's transmitted power via a downlink channel. Once the initial "handshaking" between the mobile station and base station has been completed, the mobile user transmits a random access message.

In a Spread Spectrum Slot Reservation Multiple Access (SS-SRMA) System, a slotted ALOHA (S-ALOHA) random access scheme is used. At the beginning of a slot, a mobile station will send a random access packet to the base station and then await an acknowledgment from the base station that the packet was received. This S-ALOHA scheme dispenses with a number of steps that characterize the CODIT and IS-95 random access schemes (namely, power ramping and power control).

More specifically, in a CODIT-based Code Division Multiple Access (CDMA) system, a mobile station will attempt to access the base station receiver by using a "power ramping" process that increases the power level of each successive transmitted preamble symbol. As soon as

-3-

an access request preamble is detected, the base station activates a closed loop power control circuit, which functions to control the mobile station's transmitted power level in order to keep the received signal power from the mobile station at a desired level. The mobile station then transmits its specific access request data. The base station's receiver "despreads" the received (spread spectrum) signals using a matched filter, and diversity-combines the despread signals to take advantage of antenna diversity.

In an IS-95 CDMA system, a similar random access technique is used. However, the primary difference between the CODIT and IS-95 process is that the IS-95 mobile station transmits a complete random access packet instead of just the preamble. If the base station does not acknowledge the access request, the IS-95 mobile station re-transmits the access request packet at a higher power level. This process continues until the base station acknowledges the access request.

In a mobile communications system using an S-ALOHA random access scheme, such as the method disclosed in the above-described U.S. Patent Application Serial No. 08/733,501 (hereinafter, "the '501 Application"), a mobile station generates and transmits a random access packet. A diagram that illustrates a frame structure for such a random access packet is shown in FIGURE 1. The random access packet ("access request data frame") comprises a preamble and a data field portion. The preamble contains a unique signature (bit) pattern, which is "L" symbols long. The signature pattern is randomly selected from a set of patterns that are, but not necessarily, orthogonal

-4-

to each other. As such, the use of this unique signature pattern feature, as described and claimed in the '501 Application, provides a significantly higher throughput efficiency than prior random access schemes.

5 As described in the '501 Application, the data field of the random access packet includes certain random access information, including mobile (user) identity information, required service number (number of services to be provided), required air time (time needed to complete a
10 message), short packet data message (to increase transmission efficiency), and an error detection redundancy field (cyclic redundancy code). For reasons elaborated in the '501 Application, the spreading ratio (spread spectrum modulation) of the preamble is selected
15 to be longer than the spreading ratio of the data field portion. However, situations may be envisioned in which this is not necessarily so.

The random access packet (e.g., such as the packet shown in FIGURE 1) is transmitted by the mobile station
20 at the beginning of the next available slot. A block diagram of an apparatus that can be used in a mobile station to generate and transmit the random access packet illustrated in FIGURE 1 is shown in FIGURE 2. Essentially, as illustrated by FIGURE 2, the preamble and
25 data field of the random access packet are generated and spread separately (with respective spreading codes) and then multiplexed and transmitted by the mobile station.

Next, the random access packet transmitted by the mobile station is received and demodulated at the target
30 base station with a matched filter-based receiver. FIGURE 3 is a block diagram of a detection section (for one

-5-

antenna) of a base station's random access receiver, which functions primarily to estimate the timing of the received signal rays. The matched filter, which is used only during the preamble period, is tuned to the preamble's spreading code. The matched filter is used to detect the presence of the random access request, and despread the preamble part of the random access packet and feed it to the accumulator unit. The accumulator (signatures 1-1) is a unique feature used for the '501 Application's random access method to sum the signals at the output of the matched filter during the preamble's (M) symbol periods, in order to increase the received signal-to-interference (S/I) power ratio. Since each received preamble comprises a unique signature pattern, the accumulation operation is carried out with a plurality of accumulators (1-1), with each accumulator tuned to one of the possible signature patterns to be received.

FIGURE 4 is a simple block diagram of an accumulator that can be used for the I channel (quadrature detection) in the random access detector section shown in FIGURE 3. A similar accumulator can be used for the Q channel. Referring to FIGURES 3 and 4, the output of each accumulator (signature 1-1) is coupled to a peak detection unit. At the end of the preamble period, each peak detection unit searches the output of its respective matched filter for each signal peak that exceeds a predetermined detection threshold. Each peak detection unit then registers (detects and stores) the magnitude and relative phase of each of those peak signals, and thereby determines the number of significant signal rays available for demodulation in the receiver. As such, the timing of

-6-

each peak is estimated and used to set the receiver's "rake" parameters (rake receiver sections 1-1). FIGURE 5 is a block diagram of a random access demodulator that can be used to demodulate the data field portion of the random access packet. Essentially, the random access demodulator section decodes the data information in the received data field and checks for transmission errors.

Notably, although the random access apparatus and method described above with respect to FIGURES 1-5 has numerous advantages over prior random access schemes, a number of problems still exist that remain to be solved. For example, a large number of packet collisions may occur if mobile stations in all of the cells use the same spreading codes during the preamble or data field processing stage. As a consequence, an excessive number of the random access requests will have to be retransmitted, which can lead to system instability. Moreover, using the random access apparatus and method described above, since the random access requests are transmitted at the beginning of the next time slot, the base station's matched filter receiver is not utilized as efficiently as it can be, because the matched filter receiver is idle for the complete period subsequent to the preamble reception stage. Additionally, since the length of the random access packet used with the above-described scheme is fixed, the size of the short data packets is restricted by the extent of use of the remainder of the packet. For all of these reasons, a more flexible random access request procedure is needed to resolve these problems.

SUMMARY OF THE INVENTION

-7-

It is, therefore, an object of the present invention to utilize random access channels more efficiently.

It is another object of the present invention to be capable of receiving a significantly higher number of random access requests per matched filter than received
5 by conventional means.

It is yet another object of the present invention to reduce the probability of collisions between random access requests and also minimize their loss.

It is still another object of the present invention to be capable of selecting the length of a data field in a random access request packet to allow increased flexibility in selecting the length of a short packet field.
10

It is yet another object of the present invention to provide a random access packet that can be used to quickly establish long data or voice calls.
15

It is still another object of the present invention to maintain a low level of cross-correlation between random access attempts made from neighboring sectors/cells.
20

In accordance with the present invention, the foregoing and other objects are achieved by a method that assigns each sector in a cell a unique preamble spreading code and a unique long-code which is concatenated with a short spreading code associated with a randomly selected signature, and is used to spread the data part of a random access packet. The period selected for the long-code can be relatively long in duration (e.g., up to hours or days in length). Also, the widths of the transmission time slots are set equal to the length of the preambles.
25
30

-8-

Consequently, the mobile station's random access requests can be timed to start at the beginning of the slots, and detected during the preamble periods by the matched filter in the base station's random access receiver. The data field of the mobile station's random access request is transmitted in the slots following the preamble and received by the rake receiver at the base station. However, subsequent to the preamble period, the matched filter is still enabled to receive the preambles of other random access requests. Therefore, the matched filter can be utilized continuously and more efficiently, and a significantly larger number of random access requests can be processed in comparison with prior random access schemes. As such, the communications throughput and efficiency of a random access system using the present method are substantially higher than the throughput and efficiency of prior random access systems. Additionally, the length of the data field is not restricted. The method of concatenated spreading of the data field portion of the random access packet allows a user to generate a packet which is as long as desired. Moreover, the concatenated spreading removes the danger that the resulting packet will collide with other random access request packets, since the spreading pattern and/or its phase are unique.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

-9-

FIGURE 1 is a diagram that illustrates a frame structure for a random access packet;

FIGURE 2 is a block diagram of an apparatus that can be used in a mobile station to generate and transmit the random access packet illustrated in FIGURE 1;

FIGURE 3 is a block diagram of a detection section (for one antenna) of a base station's random access receiver, which functions primarily to estimate the timing of the received signal rays;

FIGURE 4 is a simple block diagram of an accumulator that can be used for the I channel (quadrature detection) in the random access detector section shown in FIGURE 3;

FIGURE 5 is a block diagram of a random access demodulator that can be used to demodulate the data field portion of a random access packet;

FIGURE 6 is a block diagram of a pertinent section of a cellular communications system, which can be used to implement the method of the present invention;

FIGURE 7 is a diagram that illustrates the structure and timing of a plurality of random access request packets that can be transmitted by different mobile stations, in accordance with the preferred embodiment of the present invention; and

FIGURE 8 is a simple block diagram of an apparatus that can be used to implement the method for use with a mobile station to generate and transmit a random access packet such as the random access packets shown in FIGURE 7, in accordance with the preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

-10-

The preferred embodiment of the present invention and its advantages are best understood by referring to FIGURES 1-8 of the drawings, like numerals being used for like and corresponding parts of the various drawings.

5 Essentially, in accordance with the present invention, the method assigns each sector in a cell a unique preamble spreading code, and also a unique long-code which is concatenated with the data field's (signature-associated) short spreading code. The period
10 selected for the long-code can be relatively long in duration (e.g., up to hours or days in length). Consequently, it can be said that the data field of the random access packet is transmitted in a dedicated channel, because no two messages can have the same
15 spreading sequence and phase unless they have chosen the same signature and transmitted their preambles at the same time. This results in a collision of the packets, and renders these random access attempts unsuccessful. However, the probability of this happening is very small.
20 Notably, this method of assigning sector/cell-unique spreading codes and long-codes provides a significantly low probability of collision between multiple access random attempts in neighboring sectors or cells.

 Also in accordance with the present invention, the
25 method sets the widths of the transmission time slots equal to the length of the preamble (minus, for practical purposes, a predefined guard time). Consequently, the mobile station's random access request can be timed to start at the beginning of the slot, and detected during
30 the preamble period by the matched filter in the base station's random access receiver. The data field of the

-11-

mobile station's random access request is transmitted in the slots succeeding that of the preamble and received by the rake receiver at the base station. However, with the present method, subsequent to the preamble period, the
5 matched filter is enabled to receive the preambles of other random access requests made by other mobile stations. Therefore, in accordance with the present invention, the matched filter can be utilized continuously and efficiently, and a significantly larger number of
10 random access requests can be processed in comparison with prior random access schemes. As such, the communications throughput and efficiency of a random access system using the present method are significantly higher than the throughput and efficiency of prior random access systems.

15 Furthermore, in accordance with the present method, the length of the data field is not restricted. In other words, the method of concatenated spreading of the data field portion of the random access packet allows a user to generate a packet which is as long as desired.
20 Moreover, in using this concatenated spreading approach, there is very little danger that the resulting packet will collide with other random access request packets.

Specifically, referring to FIGURE 6, a pertinent section of a cellular communications system 10 is shown,
25 which can be used to implement the method of the present invention. System 10 includes a base station transmit/receive antenna 12 and transmitter/receiver section 14, and a plurality of mobile stations 16 and 18. Although only two mobile stations are shown, FIGURE 6 is
30 for illustrative purposes only, and the present invention can be assumed to include more than two mobile stations.

-12-

Prior to generating and transmitting an access request frame, a mobile station (e.g., 16) acquires synchronization, or synchronizes, with a target base station receiver (14). The mobile station then determines the starting time for each slot from the base station's broadcast/pilot channel information. The mobile station also retrieves the number of the slot being processed from the broadcast/pilot channel information, which is to be used by the base station to tag its acknowledgment (ACK) message reply with the slot number to ensure that the correct mobile receives the acknowledgment. More details for synchronizing a mobile station to a base station in a random access environment can be found in the '501 Application.

The target base station also transfers to the requesting mobile station(s) (e.g., over the downlink broadcast channel) each unique random access spreading code and long-code associated with each of the sectors and/or cells defined by the base station transceiver. For example, these unique spreading codes and long-codes can be Gold codes or Kasami codes. The mobile station stores the spreading code and long-code information in a memory storage area (not explicitly shown), which is to be retrieved and used by the mobile station to spread the preamble and data field of the random access request packets generated. Finally, the base station also transfers to the requesting mobile station(s) (e.g., in an appropriate broadcast message) the signature patterns associated with the preambles, which can be used to help distinguish between different sectors and/or cells.

-13-

For example, as described in the '501 application, in order to enable the base station receiver to more effectively distinguish between multiple random access requests, a preamble bit or symbol pattern is used. Each requesting mobile station can transmit one of L different preamble bit or symbol patterns ("signatures"). The different signature patterns used are, but not necessarily, orthogonal to each other. At the base station receiver, each of L accumulators is tuned to detect a specific signature coupled from the output of the receiver's matched filter. This signature preamble in a received signal is used by the base station receiver to effectively distinguish between simultaneous, different multiple access attempts made by the mobile stations.

FIGURE 7 is a diagram that illustrates the structure and timing of a plurality of random access request packets that can be transmitted by different mobile stations, in accordance with the preferred embodiment of the present invention. Although only three random access request packets are shown for illustrative purposes, the invention is not intended to be so limited and can include the transmission and reception of more than three such packets. Essentially, for each of the random access request packets shown (20, 22 and 24), the S-ALOHA procedure used with the present method applies only to the preamble portion of the random access request process. The length of each preamble (20, 22 and 24) is set equal to the width of the time slots (n , $n+1$, ..., $n+i$), minus (for design purposes) a predefined guard time to minimize potential interference between slots. For example, in practice, a one symbol guard time can be used. Also, as

-14-

shown, the lengths of the data field portions of the random access request packets (20, 22 and 24) can be varied according to the desired application, which provides mobiles with flexibility in transmitting
5 different length data fields.

In order to avoid collisions between any two random access attempts made by mobile stations in two different sectors of a cell, or between two random access attempts made by mobile stations in adjacent cells, the following
10 spreading method can be used. As described earlier, the mobile stations making the random access requests, each generate unique preambles using a cell-sector specific spreading code (e.g., retrieved from a respective internal memory area). In practice, these codes can be reused for
15 other cells which are separated by a sufficient distance.

FIGURE 8 is a simple block diagram of an apparatus that can be used to implement the method for use with a mobile station to generate and transmit a random access packet such as the random access packets shown in FIGURE
20 7, in accordance with the preferred embodiment of the present invention. In one embodiment, the present method can be implemented under the control of a microprocessor (not explicitly shown) located in the mobile station. The random access packet generating apparatus 100 includes a
25 signal mixer 104, which spreads a "signature i" 102 (e.g., retrieved from an internal memory area in the mobile station 18) with a specific preamble spreading code for the cell-sector involved (e.g., also retrieved from the internal memory area) to form the cell-sector specific
30 preamble of the random access packet to be transmitted. The data field of the random access packet to be

-15-

transmitted is generated with a data field generator 110. A mixer 114 spreads the generated data field with a unique short spreading code (112) associated with the "signature i". The resulting data field of the random access packet is then spread with a concatenated code, which can be constructed, for example, by a modulo-2 addition (by mixer 118) of the signature-associated short code (112) with a sector-specific long spreading code 116 (e.g., retrieved from an internal memory area). The length of the resulting data field (120) of the random access packet to be transmitted can be flexibly selected at the mobile station (e.g., hours or days long). The length of the resulting data field (120) can be varied at the mobile station, which provides an effective and quick way to establish long data or voice calls.

Although a preferred embodiment of the method and apparatus of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

-16-

WHAT IS CLAIMED IS:

1. A signal format for use in transmitting a random access request in a mobile communications system, comprising:

5 a preamble, said preamble including a signature code spread with a first spreading code, said first spreading code associated with a predetermined sector; and

10 a data field, said data field including information data spread with a short spreading code, said short spreading code associated with said signature code, said information data spread with a short spreading code further spread with a long spreading code, said long spreading code associated with said predetermined sector.

15 2. The signal format according to Claim 1, wherein a length of said preamble is set substantially equal to a width of a transmission slot.

3. The signal format according to Claim 1, wherein a length of said data field is selectively varied.

20 4. The signal format according to Claim 1, wherein a length of said data field is equal to at least one hour.

5. The signal format according to Claim 1, wherein said data field is spread by a concatenated code having at least one of a unique pattern and phase.

25 6. The signal format according to Claim 1, wherein said signature code comprises one of a plurality of signature patterns.

-17-

7. The signal format according to Claim 1, wherein said preamble and said data field comprise a random access packet.

5 8. A preamble format for use in transmitting a random access request in a mobile communications system, comprising:

a signature code; and

a spreading code, said spreading code associated with a predetermined sector.

10 9. A data field format for use in transmitting a random access request in a mobile communication system, comprising:

an information data field; and

15 a short spreading code, said information data spread with said short spreading code, said short spreading code associated with a signature code, said information data spread with a short spreading code further spread with a sector-associated long spreading code.

20 10. A method for use in creating a random access packet in a mobile communications system, comprising the steps of:

generating a preamble by combining a signature code with a spreading code, said spreading code associated with a predetermined sector;

25 generating a data field;

spreading said data field with a short code associated with said signature code; and

further spreading said spread data field with a long spreading code associated with said predetermined sector.

-18-

11. The method according to Claim 10, further comprising the step of transmitting said random access packet from a mobile station.

5 12. The method according to Claim 10, wherein said step of generating a preamble further comprises setting a length of said preamble to coincide substantially with a duration of a transmission slot.

10 13. The method according to Claim 10, wherein said further spreading step comprises the step of selecting a length of said data field.

14. The method according to Claim 10, further comprising the step of utilizing a matched filter in a target base station receiver during a period of time subsequent to transmitting said preamble.

15 15. The method according to Claim 10, wherein said further spreading step comprises the step of concatenating said spread data field with said long spreading code.

16. The method according to Claim 15, wherein said concatenating step comprises modulo-2 addition.

20 17. An apparatus for use in creating a random access packet in a mobile communications system, comprising:
first generating means for generating a preamble;
first spreading means for spreading a signature code with a spreading code associated with a predetermined
25 sector;

-19-

second generating means for generating a data field;
second spreading means for spreading said data field
with a short code associated with said signature code; and
third spreading means for spreading said spread data
5 field with a long spreading code associated with said
predetermined sector.

18. The apparatus according to Claim 17, further
comprising a microprocessor located in a mobile station.

19. The apparatus according to Claim 17, wherein a
10 length of said preamble corresponds substantially with a
duration of a transmission slot.

FIG. 1

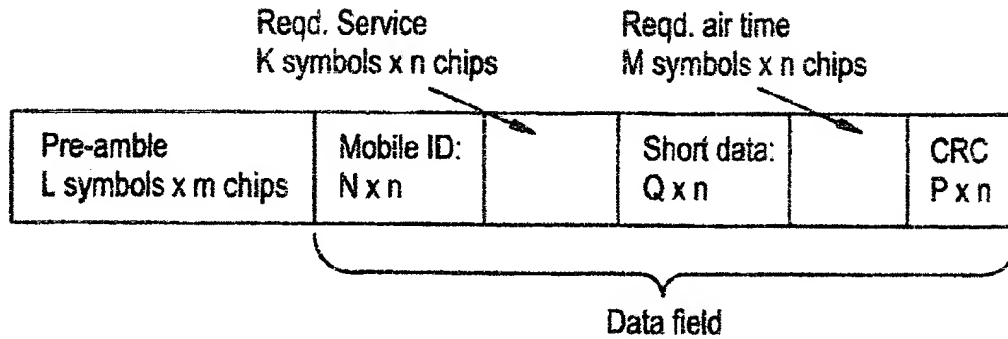


FIG. 2

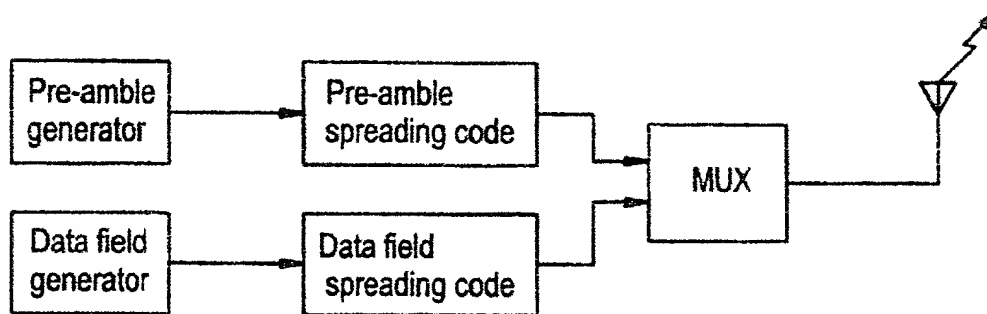


FIG. 3

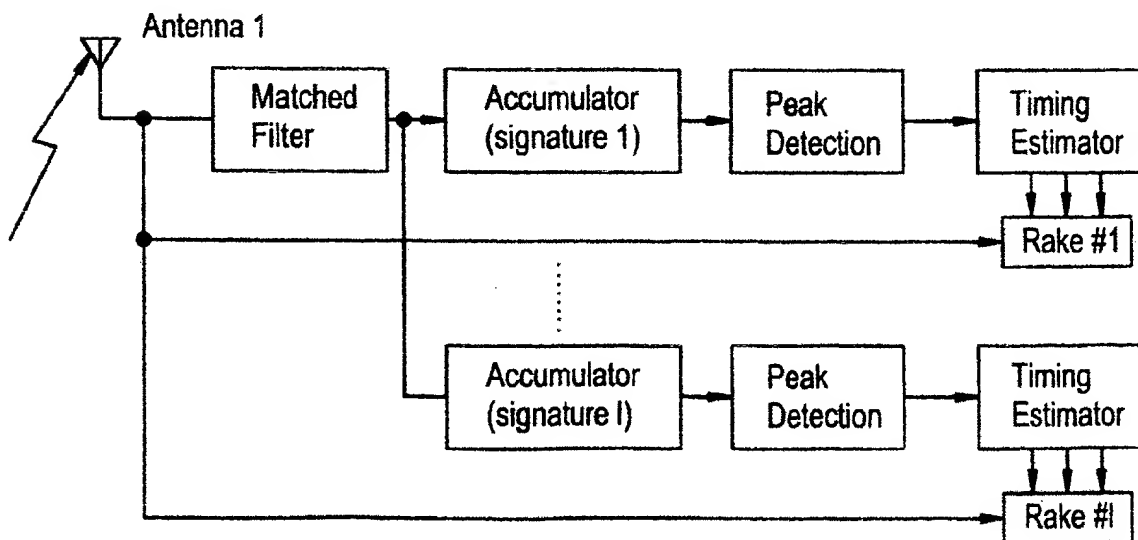


FIG. 4

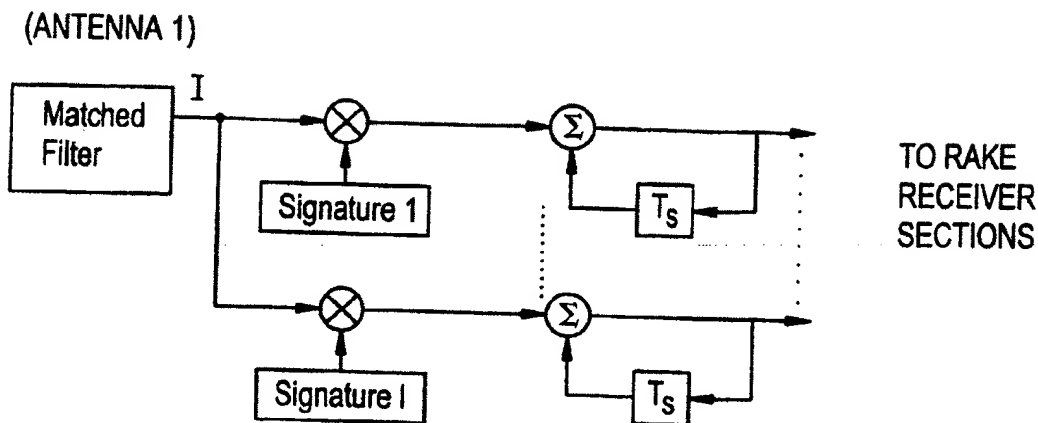


FIG. 5

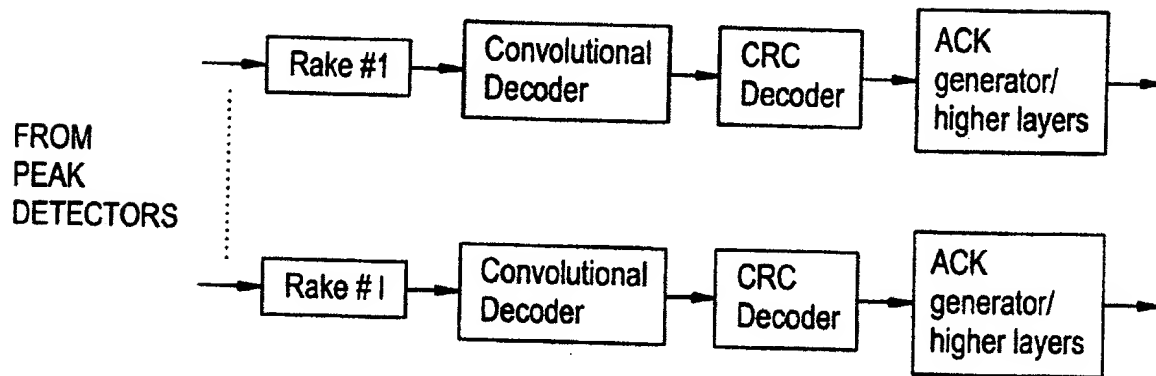


FIG. 6

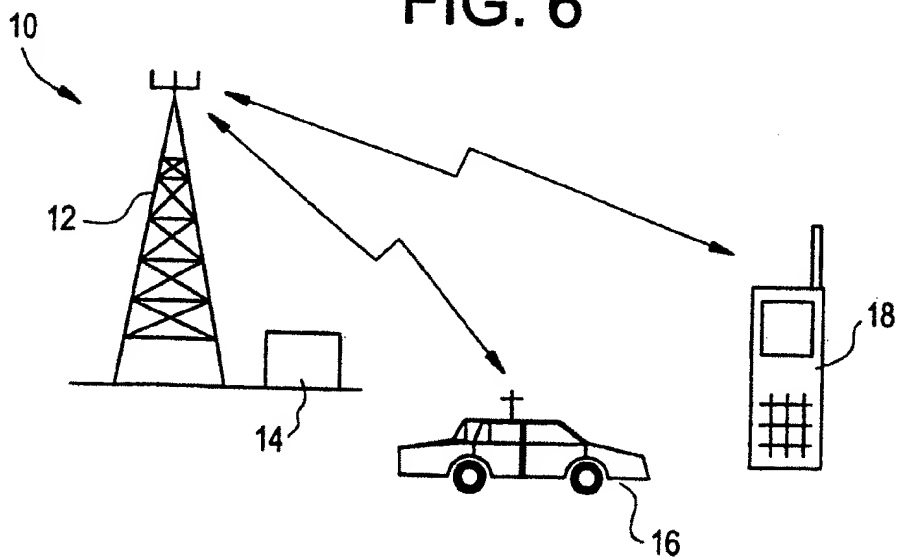


FIG. 7


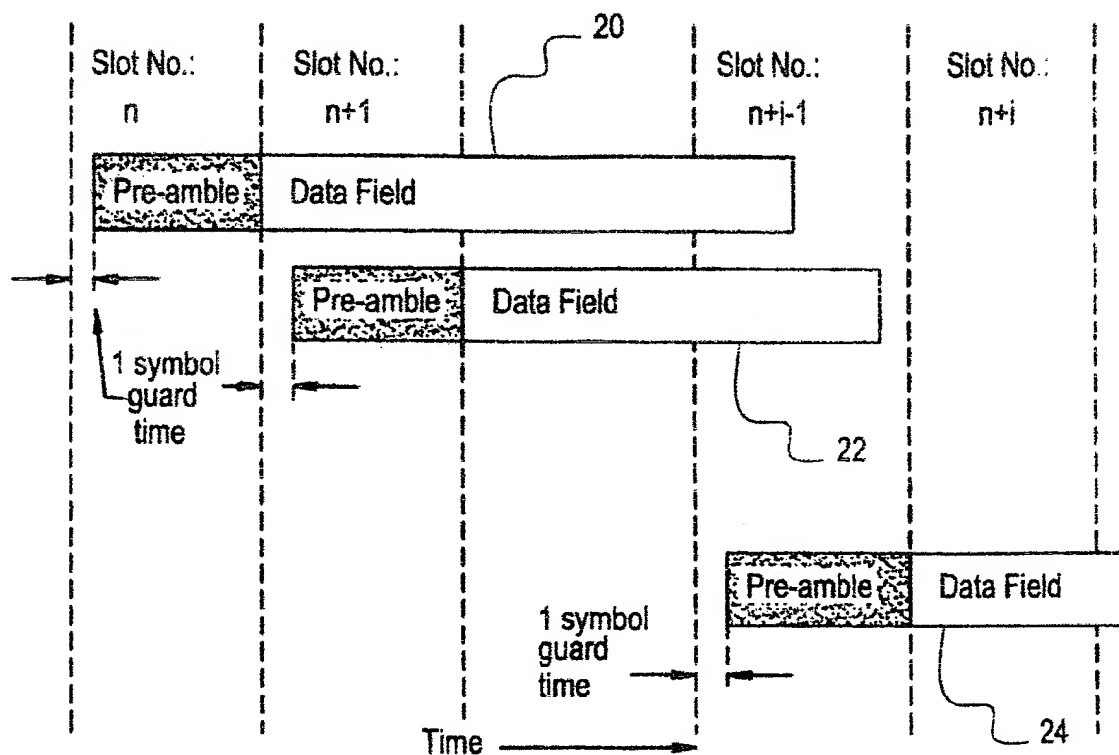


FIG. 8

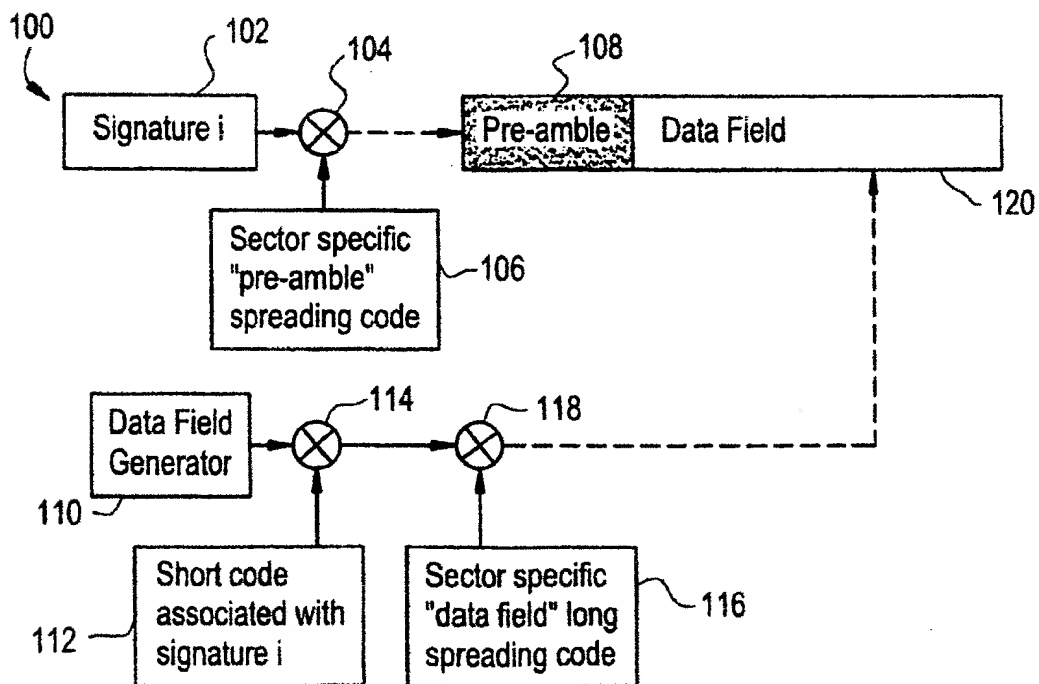

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/00751

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/38 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 621 752 A (ANTONIO ET AL.) 15 April 1997 see column 2, line 52 - column 4, line 61	1,8-10, 17
A	WO 97 11571 A (AIRNET COMMUNICATIONS CORP) 27 March 1997 see page 3, line 15 - page 4, line 19	1,8-10, 17
A	WO 95 22210 A (QUALCOMM INC) 17 August 1995 see column 4, line 27 - column 10, line 15	1,8-10, 17
A	WO 94 26074 A (AIRTOUCH COMMUNICATIONS) 10 November 1994 see page 6, line 34 - page 7, line 23 --- -/--	1,8-10, 17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

14 August 1998

Date of mailing of the international search report

11/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

GASTALDI, G

INTERNATIONAL SEARCH REPORT

Int. Patent Application No.

PCT/SE 98/00751

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 96 13952 A (AIRNET COMMUNICATIONS CORP) 9 May 1996 see column 3, line 9 - column 6, line 2 -----</p>	<p>1,8-10, 17</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/00751

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5621752	A	15-04-1997	AU 685966 B	29-01-1998
			AU 2908695 A	19-01-1996
			BR 9508102 A	12-08-1997
			CN 1151228 A	04-06-1997
			EP 0767994 A	16-04-1997
			FI 965180 A	20-02-1997
			JP 10502504 T	03-03-1998
			WO 9600466 A	04-01-1996
WO 9711571	A	27-03-1997	US 5758090 A	26-05-1998
			AU 7247596 A	09-04-1997
WO 9522210	A	17-08-1995	AU 682939 B	23-10-1997
			AU 1876295 A	29-08-1995
			BR 9506683 A	16-09-1997
			CA 2183258 A	17-08-1995
			CN 1146832 A	02-04-1997
			EP 0775393 A	28-05-1997
			FI 963153 A	10-10-1996
			JP 10500807 T	20-01-1998
			ZA 9500797 A	20-06-1996
WO 9426074	A	10-11-1994	US 5504936 A	02-04-1996
			US 5479397 A	26-12-1995
			US 5678186 A	14-10-1997
WO 9613952	A	09-05-1996	US 5649292 A	15-07-1997
			AU 684679 B	18-12-1997
			AU 4196996 A	23-05-1996
			CA 2203994 A	09-05-1996
			EP 0789978 A	20-08-1997